

IFW



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Pro Patent Application of

Riordan

Serial No.: 10/811,177

Filed: March 26, 2004

For: DATA PROCESSING SYSTEMS

Date: November 17, 2004

Group Art Unit: 2131

Examiner: Not yet assigned

Docket No.: CH920020047US1

Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450

CERTIFICATE OF MAILING UNDER 37 CFR 1.8 (a)

I hereby certify that the attached correspondence comprising:

Submission of Priority Document
Certified Copy of European Patent Application No. 03007223.5
Acknowledgment Postcard

is being deposited with the United States Postal Service as first class mail in an envelope addressed to:

**Commissioner for Patents
P. O. Box 1450
Alexandria, VA 22313-1450**

On November 18, 2004

Allison Berkman
(Type or printed name of person mailing paper or fee)

Allison Berkman
(Signature of person mailing paper or fee)

THIS PAGE BLANK (USPTO)



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

Riordan

Serial No.: 10/811,177

Filed: March 26, 2004

For: DATA PROCESSING SYSTEMS

Date: November 17, 2004

Group Art Unit: 2131

Examiner: Not yet assigned

Docket No.: CH920020047US1

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

SUBMISSION OF PRIORITY DOCUMENT

Sir:

Enclosed herewith is a certified copy of European Application No. 03007223.5
filed March 31, 2003, in support of applicant's claim to priority under 35 U.S.C. 119.

Respectfully submitted,

By

Louis P. Herzberg

Reg. No. 41,500

Phone No. (914) 945-2885.

IBM Corporation
Intellectual Property Law Dept.
P.O. Box 218
Yorktown Heights, NY 10598

THIS PAGE BLANK (USPTO)



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03007223.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)



Anmeldung Nr.:
Application no.: 03007223.5
Demande no:

Anmeldetag:
Date of filing: 31.03.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

International Business Machines Corporation
New Orchard Road
Armonk, NY 10504
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Data processing systems

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G06F1/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

THIS PAGE BLANK (USPTO)

CH9-2002-0047

1

DATA PROCESSING SYSTEMS

The present invention generally relates to data processing systems and particularly relates to methods and apparatus for introducing security measures to data processing systems.

5 A data processing system typically comprises a central processing unit (CPU), an input/output (I/O) subsystem, and a memory subsystem, all interconnected by a bus subsystem. The memory subsystem typically comprises random access memory (RAM), read only memory (ROM), and one or more data storage
10 devices such as hard disk drives, optical disk drives, and the like. The I/O subsystem typically comprises: a display; a printer; a keyboard; a pointing device such as a mouse, tracker ball, or the like; and one or more network connections permitting communications between the data processing system
15 and one or more similar systems and/or peripheral devices via a data communications network. The combination of such systems and devices interconnected by such a network may itself form a distributed data processing system. Such distributed systems may be themselves interconnected by additional data
20 communications networks. In the memory subsystem is stored data and computer program code executable by the CPU. The program code includes operating system software and application software. The operating system software, when executed by the CPU, provides a platform on which the
25 application software can be executed. The operating system software has a core or kernel of code in which the basic functions of the operating system software are defined.

A problem associated with data processing systems is that of security. In particular, it is becoming increasingly difficult
30 to determine with any degree of certainty that a data processing system actually has the properties it is believed to have. This difficulty arises because data processing systems, and particularly the operating systems therein, are becoming increasingly general purpose, configurable, and
35 reconfigurable in nature. The administrative state of a data

CH9-2002-0047

2

processing systems can be varied from one moment to the next based on an administrative action. Specifically, the administrative state of a data processing system is defined by the combination of software and data present in the machine.

- 5 The software may include binary files, patches, applications, and the like added to and deleted from the system from time to time via one or more administrative actions. An administrative action such as the addition or deletion of software in the system can thus be regarded as a change in the state of the
- 10 system. Many data processing systems can be placed into a corrupt state by users and/or system administrators with or without proper authorization. This form of corruption is difficult to detect. It would be desirable to make such corruption easier to detect.

- 15 Many data processing networks employ intrusion detection and diagnosis (IDD) systems. These IDD systems are typically data processing systems resident on the network and dedicated to intrusion detection and diagnosis. It will be appreciated that detection of corruption is important in the field of IDD.
- 20 Most intruders do not want to be detected. Thus, administration tools employed in IDD systems are among the first to be attacked.

- Cracker tools allow hackers, crackers, or other attackers to selectively hide files, processes, and network connections in
- 25 an individual host data processing system. An example of a conventional cracker tool is known as "rootkit". Rootkit replaces Unix system commands used for investigation, such as ls, ps, netstat, and ifconfig, with so-called Trojan horse versions that hide the activities of an attacker.
- 30 Conventionally, such Trojan horses have been identified by calculating, storing, and comparing databases of cryptographic checksums of system binaries. However, recent versions of "rootkit" include Trojan horse versions of the programs employed to generate and compare the checksums. Attackers have
- 35 recently begun to employ loadable kernel modules to introduce Trojan horses to data processing systems. A kernel is

CH9-2002-0047

3

difficult to inspect when running. Thus, Trojan horse modules therein remain undetected. A typical defense against such Trojan horse modules is to prevent kernel modules from being loaded. However, system functionality is then limited.

5 There is growing interest in releasing computer software in source code form under "open source" licenses such as the "General Public License" and the like. Such releases facilitate creation of Trojan horses, particularly when the software in question is operating system software. The
10 detection of Trojan horses is therefore of increasing importance. IDD systems are an early target for infiltration by Trojan horses. Here, the attacker typically alters the IDD system in such a manner that it appears to continue functioning normally, but in reality hides the attacker's
15 activities.

Conventional security schemes for data processing systems include secure logging schemes and forward secrecy of digital signatures.

Secure logging schemes are directed to the protection of
20 integrity, secrecy, and authenticity of records of data processing events. The schemes may be employed in maintaining quality standards of event logging. In general, secure logging schemes assume the existence of a secure logging host data processing system and operate in dependence on a combination
25 of message or stream encryption, hash chaining, authentication codes, and one way key evolution.

Forward secrecy of digital signatures is directed to limiting damage to compromised signature keys. In operation, forward secrecy of digital signatures provides a series of signing
30 keys:

$$SK_0 \Rightarrow SK_1 \Rightarrow SK_2 \Rightarrow \dots$$

CH9-2002-0047

4

So that SK_{n+1} is a derivation of SK_n , and that verification of a signature does not require distribution, traversal, and verification of a chain of keys.

In accordance with the present invention, there is now
5 provided a method for detecting an attack on a data processing system, the method comprising, in the data processing system: providing a initial secret; binding the initial secret to data indicative of an initial state of the system via a cryptographic function; recording state changing
10 administrative actions performed on the system in a log; prior to performing each state changing administrative action, generating a new secret by performing the cryptographic function on a combination of data indicative of the administrative action and the previous secret, and erasing the
15 previous secret; evolving the initial secret based on the log to produce an evolved secret; comparing the evolved secret with the new secret; determining that the system is uncorrupted if the comparison indicates a match between the evolved secret and the new secret; and, determining that the
20 system is corrupted if the comparison indicate a mismatch between the evolved secret and the new secret.

The cryptographic function preferably comprises a one-way hash function. The hash function may comprise an exponentiation function. In a preferred embodiment of the present invention,
25 the cryptographic function comprises a public/private key pair. The initial secret may be received from a system administrator.

Viewing the present invention from another aspect, there is now provided a data processing system comprising: a
30 processor; a memory connected to the processor; and, detection logic connected to the processor and the memory, the detection logic, in use: providing a initial secret; binding the initial secret to data indicative of an initial state of the system via a cryptographic function; recording state changing
35 administrative actions performed on the system in a log; prior

CH9-2002-0047

5

to performing each state changing administrative action, generating a new secret by performing the cryptographic function on a combination of data indicative of the administrative action and the previous secret, and erasing the
5 previous secret; evolving the initial secret based on the log to produce an evolved secret; comparing the evolved secret with the new secret; determining that the system is uncorrupted if the comparison indicates a match between the evolved secret and the new secret; and, determining that the
10 system is corrupted if the comparison indicate a mismatch between the evolved secret and the new secret.

The present invention also extends to a computer program element comprising computer program code means which, when loaded in a processor of a computer system, configures the
15 processor to perform the aforementioned attack detection method.

The present invention advantageously provides a method for cryptographic entangling of state and administration in a data processing system that permits detection of Trojan horses
20 within the system.

In a preferred embodiment of the present invention, an initial secret is evolved in a data processing system in an irreversible manner. The evolution progresses based on administrative actions in the system. As the evolution
25 progresses, previous secrets are overwritten. Proof of knowledge of the evolved secret thus equates to a cryptographic verification of the history of administrative action in the system. Thus, if the initial state of the system is known, the current state can be determined. If the initial
30 state is known to have been an uncorrupted state, then an absence of subsequent corruption can be proved. It can then be determined that the system remains uncorrupted.

CH9-2002-0047

6

In a particularly preferred embodiment of the present invention, the aforementioned cryptographic entangling has initialization, update, and proof stages.

5 In the initialization stage, the system generates an initial secret and releases binding data that binds to the secret. The binding data may take different forms depending on application.

10 In the update stage, the system updates the secret each time there is an administrative action that could lead to system corruption such as infiltration of system level Trojan horses. Examples of such corruption actions include: updating of system executable code; updating of system libraries; installation of kernel modules; reading of files such as those used to store system states during rebooting operations;

15 alteration of configuration files; alteration of system run-level codes; and, writing to or reading from peripheral devices. Each update proceeds in the following manner. First, a new secret is computed by applying a one way function to the combination of the previous secret, a description of the

20 action, and associated context information. Then, the previous secret and any information from which it might be derived is completely overwritten or otherwise erased. A description of the action is then logged. Finally the action is performed.

In the proof stage, the system offers a proof that its current

25 secret corresponds to the initial secret as it has evolved according to the record of logged actions.

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

30 Figure 1 is a block diagram of an example of a data processing system embodying the present invention;

CH9-2002-0047

7

Figure 2 is a flow diagram associated with the data processing system;

Figure 3 is another flow diagram associated with the data processing system;

5 Figure 4 is yet another flow diagram associated with the data processing system;

Figure 5 is a further flow diagram associated with the data processing system; and,

Figure 6 is a block diagram of a data processing system in a
10 layer format.

Referring first to Figure 1, a data processing system comprises a CPU 10, an I/O subsystem 20, and a memory subsystem 40, all interconnected by a bus subsystem 30. The memory subsystem 40 may comprise random access memory (RAM),
15 read only memory (ROM), and one or more data storage devices such as hard disk drives, optical disk drives, and the like. The I/O subsystem 20 may comprises: a display; a printer; a keyboard; a pointing device such as a mouse, tracker ball, or the like; and one or more network connections permitting
20 communications between the data processing system and one or more similar systems and/or peripheral devices via a data communications network. The combination of such systems and devices interconnected by such a network may itself form a distributed data processing system. Such distributed systems
25 may be themselves interconnected by additional data communications networks.

In the memory subsystem 40 is stored data 60 and computer program code 50 executable by the CPU 10. The program code 50 includes operating system software 90 and application software
30 80. The operating system software 90, when executed by the CPU 10, provides a platform on which the application software 80 can be executed. The operating system software 90 has a core

CH9-2002-0047

8

or kernel 100 of code in which the basic functions of the operating system software 90 are defined.

In a preferred embodiment of the present invention, the program code 50 stored in the program code 50 stored in the memory subsystem 40 also includes detector logic comprising a cryptographic entangling facility (CEF) 70. The CEF 70 is associated with a log file 110 also stored in the memory subsystem 40. The CEF 70 may be separate from the operating system software 90 as shown or embedded in the operating system software 90. In a particularly preferred embodiment of the present invention, the CEF 70 is embedded in the kernel 100 of the operating system software 90.

In operation, the CEF 70 entangles the state and administration of the data processing system in a cryptographic manner. The entangling permits detection of Trojan horses and the like within the system.

As indicated earlier, the administration of the data processing system includes administrative actions such as the addition, deletion, or other reconfiguration of the program code 50 and data 60 recorded in the memory subsystem 40. Each administrative action effectively changes the data processing system from one state to another.

The cryptographic entangling is developed based on an initial secret. The secret is evolved by the CEF 70 in an irreversible manner. The evolution of the secret progresses in steps. Each step corresponds to and is triggered by a change in state of the data processing system. Whenever an administrative action is to be performed in the data processing system, producing a change of state in the data processing system, there is a corresponding and preceding step in the evolution of the secret. At each step, the CEF 70 overwrites or otherwise deletes the previous secret from the memory subsystem 40. The CEF 70 produces a new secret based on the previous secret together with data indicative of the corresponding

CH9-2002-0047

9

administrative action. The new secret is recorded by the CEF 70 in place of the previous secret. The administrative action is then performed. Proof of knowledge of the evolved secret thus equates to a cryptographic verification of the history of administrative action in the data processing system. Thus, if the initial state of the system is known, the current state can be determined. If the initial state is known to have been an uncorrupted state, then an absence of subsequent corruption can be proved. It can then be determined that the system remains uncorrupted.

Referring now to Figure 2, in preferred embodiments of the present invention, the cryptographic entangling has an initialization stage 200, an update stage 210, and a proof stage 220.

Referring to Figure 3, in the initialization stage 200, the CEF 70, at step 300 generates an initial secret. The initial secret is supplied a system administrator via a secure communication channel. Alternatively, in other embodiments of the present invention, the initial secret may be entered to the CEF 70 by the system administrator. At step 310, the CEF 70 releases binding data. At step 320, the CEF 70 binds the binding data to the secret. The binding data may take different forms depending on the data processing system, the or each application of the data processing system, and trust mechanisms associated with communication of the secret.

Referring to Figure 4, in the update stage 210, the CEF 70 updates the secret each time there is an administrative action. Specifically, the update is triggered by and performed in advance of administrative action. As indicated earlier, examples of such actions include: updating of system executable code; updating of system libraries; installation of kernel modules; reading of files such as those used to store system states during rebooting operations; alteration of configuration files; alteration of system run-level codes; and, writing to or reading from peripheral devices. Each

CH9-2002-0047

10

update proceeds in the following manner. First, at block 400, the CEF 70 computes a new secret. The new secret is computed by the CEF 70 applying a one way function to the combination of the previous secret and data indicative of the

5 administrative action. At block 410, the CEF 70 erases the previous secret, together with any information from which it might be derived. At block 420, the CEF 70 records data indicative of the administrative action in the log file 110. At block 430, the CEF 70 permits execution of the
10 administrative action.

With reference to Figure 5, in the proof stage 220, the CEF 70 offers a proof that its current secret corresponds to the initial secret as it has evolved according to the record of actions contained in the log file 110. Specifically, at block
15 500, the CEF 70 retrieves the initial secret. The initial secret may be retrieved, for example, via a request for entry of the initial secret by a system administrator. At block 510, the CEF 70 retrieves the record of administrative actions from the log file 110 stored in the memory subsystem 40. At block
20 520, the CEF 70 evolves the initial secret based on the record of administrative actions retrieved from the log file 110. At block 530, the CEF 70 compares the secret evolved in block 520 with its current secret. If the secrets match, then, at block 550, the CEF 70 reports that the data processing system is
25 still in an uncorrupted state. If however the secrets do not match, then, at block 540, the CEF 70 reports that the data processing system is in a potentially corrupted or otherwise compromised state.

The operation of the CEF 70 in a particularly preferred
30 embodiment of the present invention will now be described. In the following explanation, an ordered collection of administrative actions in the data processing system is denoted by $\{M_i\}$, where i is an index. The index may for example be time. However, such it will appreciated that intervals
35 between successive administrative actions may be irregular. The secret known by the CEF 70 at i is S_i . $P(S_i)$ is data that

CH9-2002-0047

11

provably binds the data processing system to the secret S_i . During the initialization stage 200, the CEF 70 chooses secret S_0 and releases data $P(S_0)$. As indicated earlier, the form of release depends on application. In the update stage 210, the

5 secret S_i is updated according to the mapping $(S_n, M_n) \Rightarrow S_{n+1}$. The mapping $(S_n, M_n) \Rightarrow S_{n+1}$ is a one way collision resistant cryptographic hash function such as MD-5 or SHA-1. Collision resistance in this context implies that the pair S_n and S_{n+1} together provide a binding to administrative action M_n . The

10 evolution can thus be represented by:

$$\begin{array}{ccccccc}
 S_0 & \xRightarrow{M_0} & S_1 & \xRightarrow{M_1} & S_2 & \dots & \xRightarrow{M_{n-1}} S_n \\
 \downarrow & \dots & \downarrow & \dots & \downarrow & \dots & \downarrow \\
 P(S_0) & \xrightarrow{M_0} & P(S_1) & \xrightarrow{M_1} & P(S_2) & \dots & \xrightarrow{M_{n-1}} P(S_n)
 \end{array}$$

Where the mapping $P(S_n) \rightarrow P(S_{n+1})$ is an indication that an

15 administrator can verify that data $P(S_{n+1})$ is derived from data $P(S_n)$ according to administrative action M_n .

In a preferred embodiment of the present invention, the initial secret is shared between the data processing system and the administrators of the data processing system, as

20 indicated earlier. The computational overhead associated with this arrangement is advantageously low. However, this arrangement also assumes that all the administrators are benign. At the initialization stage 200, the initial secret S_0 is generated by the CEF 70 and provided via a secure

25 communications channel to the administrators. In the update stage 210, the CEF 70 employs a collision resistant cryptographic hash function h to update the secret, as follows:

$$S_{n+1} = h(\text{"Update"}, S_n, M_n)$$

30 "Update" is a text word included in each update to avoid spoofing attacks.

CH9-2002-0047

12

In the proof stage 220, an administrator supplies the index i to the CEF 70. In response, the CEF 70 returns $h(S_n, i)$. The initial secret S_0 is known to administrator. In addition, the history of administrative actions $\{M_n\}$ is recorded in the log file 110. S_n can thus be computed. Because h is collision free, it is possible to conclude that the data processing system knows S_n .

In another preferred embodiment of the present invention, public key encryption is employed. This has an advantage in that the administrators of the data processing system need not trust one another. In the initialization stage 200, the CEF 70 generates a public/private key pair and publishes the public key.

In the update stage 210, CEF 70 generates, for each administrative action, a new public/private key pair. The CEF 70 then signs the combination of the new key and data indicative of the administrative action M_n with the previous key. The CEF 70 records both the signature and the signed data in the log file. The CEF 70 then erases the old private key. Only then does the CEF 70 permit the data processing system to perform the administrative action.

In the proof stage 220, the administrator supplies index i . In response, the CEF 70 then signs the combination of i with the current public key. The history of administrative actions $\{M_n\}$ is known. Therefore, the chain of signatures can be verified. Therefore, the current public key can be computed. The ability of the CEF 70 to sign a user influenced message demonstrates that the CEF 70 knows the private key. Thus, the state of the data processing system can be confirmed.

Another preferred embodiment of the present invention involves large prime numbers. In the initialization stage 200, the CEF 70 chooses two large prime numbers p_1, p_2 . The CEF 70 also chooses an element g of high order in the group $G = (\mathbb{Z}/p_1 p_2 \mathbb{Z})^*$.

CH9-2002-0047

13

The CEF 70 picks x where random $x \in [1, p_1 p_2]$. In addition, the CEF 70 sets $S_0 = g^x$. The CEF 70 further picks y where random $y \in [1, p_1 p_2]$. The CEF 70 publishes g^y , g , y , and the product $p_1 p_2$. The CEF 70 thus binds the data processing system to g^x .

- 5 In the update stage 210, the CEF 70 generates new secrets based on $S_{n+1} = (S_n)^{h(n, M_n)} \cdot g$. This operation is effectively one way as it is difficult to take roots in the group G . Multiplication by g is added to avoid degenerately small subgroups.
- 10 In the proof stage 220, the administrator supplies t . In response, the CEF 70 returns $(S_n)^{2h(t)}$. The history of administrative actions $\{M_n\}$ is known from the log file 110. Modular exponentiation inside the group G can be performed. The CEF 70 can compute $(S_n)^y)^{2h(t)}$ by mimicking the updates and
- 15 computations that have been performed using g^y rather than the system value of g^x . The value returned raised to the power y can be verified.

- Yet another particularly preferred embodiment of the present invention involves Sophie-Germain prime numbers. In the
- 20 initialization stage 200, the CEF 70 chooses two Sophie-Germain prime numbers p_1, p_2 . The CEF 70 also chooses an element g in the group $G = (\mathbb{Z}/p_1 p_2 \mathbb{Z})^*$ with a large prime order greater than the maximum of the hash function $h(\cdot)$. In addition, the CEF 70 chooses random $x \in [1, p_1 p_2]$. The CEF 70 also chooses
- 25 random $y \in [1, p_1 p_2]$. The CEF 70 sets $S_0 = g^x$. In addition, the CEF 70 publishes g^y , g , y , and the product $p_1 p_2$. In the update stage 210, the CEF 70 generates new secrets based on $S_{n+1} = (S_n)^{h(n, M_n)}$. As indicated earlier, it is difficult to take roots in the group G . Thus, $S_{n+1} = (S_n)^{h(n, M_n)}$ is effectively one
- 30 way. Because $h(n, M_n) < \text{order}(g)$, no entropy is lost. Degenerate subgroups are thus avoided. The proof stage 220 here is similar to that described in the preceding example.

CH9-2002-0047

14

With reference now to Figure 6, a data processing system as herein before described with reference to Figure 1 can be represented as a stack of data processing layers 600-630. Each layer in the stack forms a foundation of processing for the next layer in ascending order. At the base level, there is the hardware layer 630 comprising the CPU 10, and logic circuitry of the I/O subsystem 20, memory subsystem 40, and bus subsystem 30. Beyond the hardware layer is the kernel layer 620, comprising the kernel 100. Beyond the kernel layer 620 is the operating system layer, comprising the remainder of the operating system 90. On the operating system 90 is the application 600, comprising the application software 80. Other stacked subdivisions of the data processing system may be apparent to those skilled in the art. In general, embodiments of the present invention may be installed in one or more of the data processing layers 600-630. Each installation then protects the layer in which it is hosted from corruption.

In the examples of the present invention herein before described, all administrative actions producing a change in state of the data processing system trigger an update of the secret. However, in other embodiments of the present invention, only a subset of such actions may trigger an update of the secret. For example, only actions potentially leading to infiltration of system level Trojan horses may trigger an update of the secret.

Also, in the preferred embodiments of the present invention herein before described, the CEF 70 is implemented by computer program code executing on the CPU 10 of the data processing system. It will be appreciated that, in other embodiments of the present invention, the CEF 70 may be implemented at least partially by hardwired logic circuitry. In particularly preferred embodiments of the present invention, the CEF 70 may be embedded in a trusted subsystem of the data processing system.

CH9-2002-0047

15

CLAIMS

1. A method for detecting an attack on a data processing system, the method comprising, in the data processing system: providing a initial secret; binding the initial secret to data
5 indicative of an initial state of the system via a cryptographic function; recording state changing administrative actions performed on the system in a log; prior to performing each state changing administrative action, generating a new secret by performing the cryptographic
10 function on a combination of data indicative of the administrative action and the previous secret, and erasing the previous secret; evolving the initial secret based on the log to produce an evolved secret; comparing the evolved secret with the new secret; determining that the system is
15 uncorrupted if the comparison indicates a match between the evolved secret and the new secret; and, determining that the system is corrupted if the comparison indicates a mismatch between the evolved secret and the new secret.
2. A method as claimed in claim 1, wherein the cryptographic
20 function comprises a one-way hash function.
3. A method as claimed in claim 2, wherein the hash function comprises an exponentiation function.
4. A method as claimed in claim 1, wherein the cryptographic function comprises a public/private key pair.
- 25 5. A method as claimed in any preceding claim, comprising receiving the initial secret from a system administrator.
6. A data processing system comprising: a processor; a memory connected to the processor; and, detection logic connected to the processor and the memory, the detection
30 logic, in use: providing a initial secret; binding the initial secret to data indicative of an initial state of the system

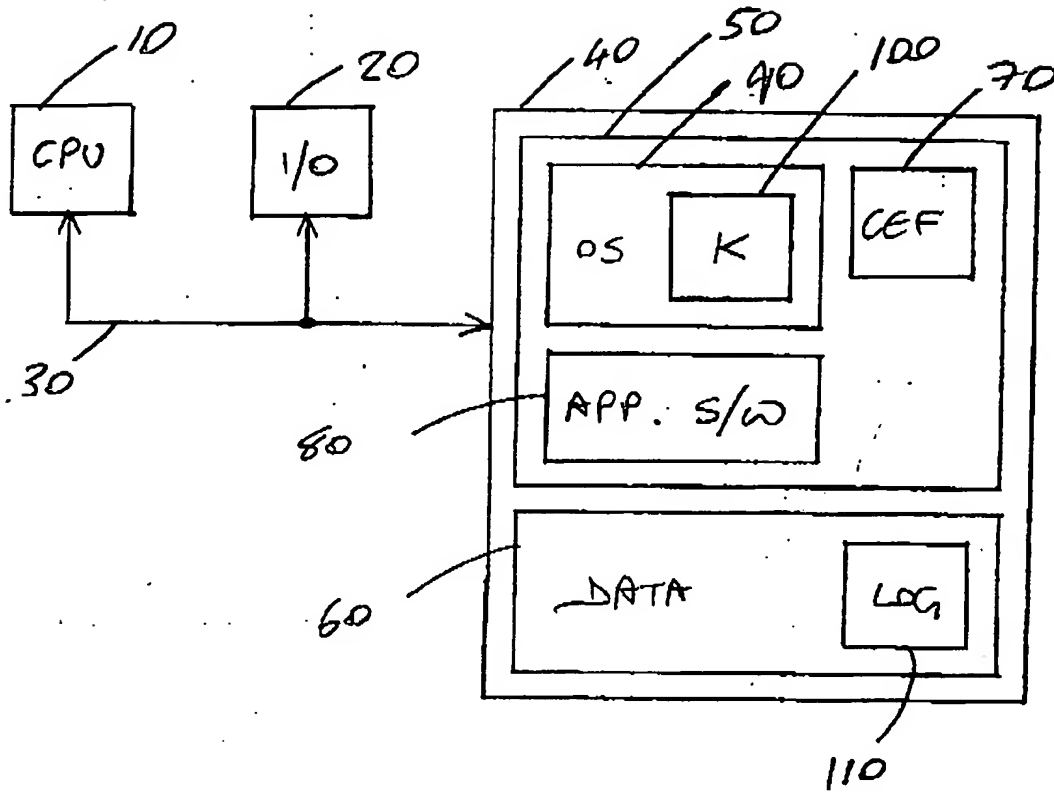
CH9-2002-0047

16

- via a cryptographic function; recording state changing administrative actions performed on the system in a log; prior to performing each state changing administrative action, generating a new secret by performing the cryptographic
- 5 function on a combination of data indicative of the administrative action and the previous secret, and erasing the previous secret; evolving the initial secret based on the log to produce an evolved secret; comparing the evolved secret with the new secret; determining that the system is
- 10 uncorrupted if the comparison indicates a match between the evolved secret and the new secret; and, determining that the system is corrupted if the comparison indicate a mismatch between the evolved secret and the new secret.
7. A system as claimed in claim 6, wherein the cryptographic
- 15 function comprises a one-way hash function.
8. A system as claimed in claim 7, wherein the hash function comprises an exponentiation function.
9. A system as claimed in claim 6, wherein the cryptographic function comprises a public/private key pair.
- 20 10. A system as claimed in any of claims 6 to 9, wherein the detector logic receives the initial secret from a system administrator.
11. A computer program element comprising computer program code means which, when loaded in a processor of a computer
- 25 system, configures the processor to perform a method as claimed in any of claims 1 to 5.

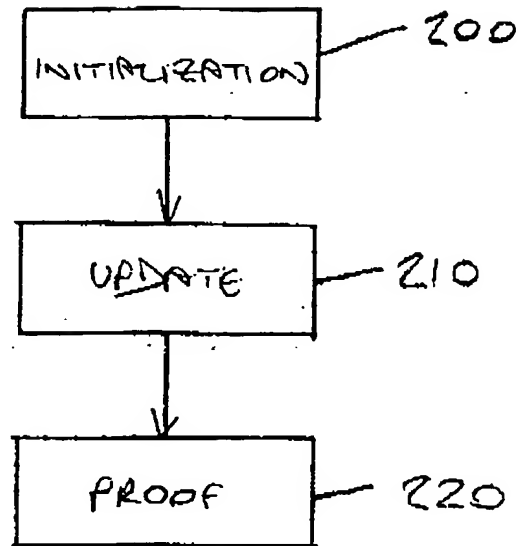
CH9-2002-0047

1/6

FIG. 1

CHA-2002-0047

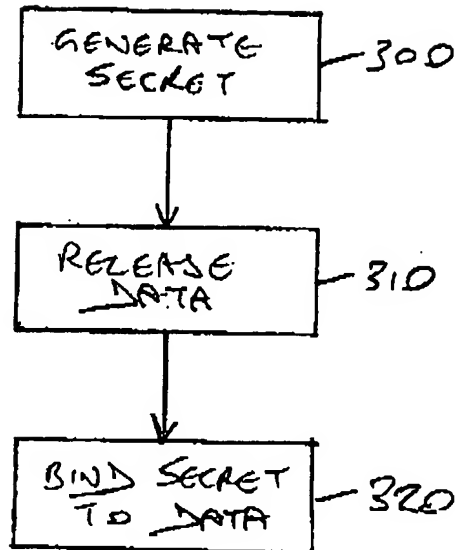
2/6

FIG. 2

CH4-2002-0047

3/6

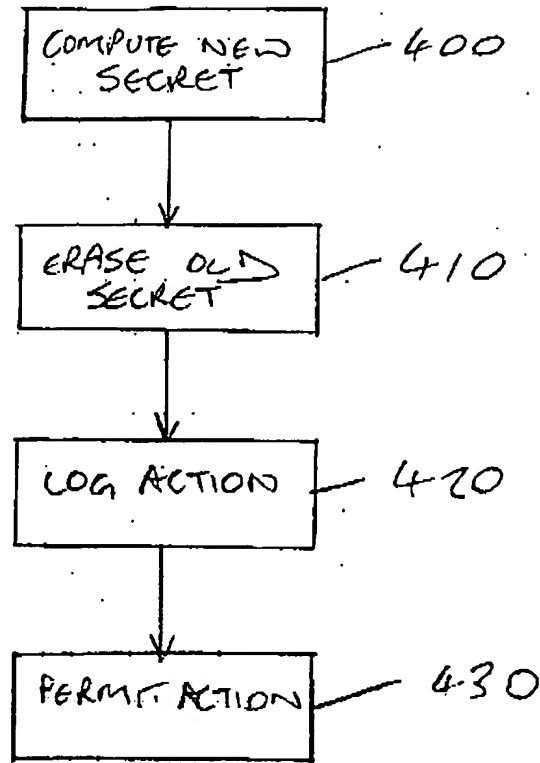
027 31.03.2003 17:15:26

Fig. 3

BEST AVAILABLE COPY

CHA-2002-0027

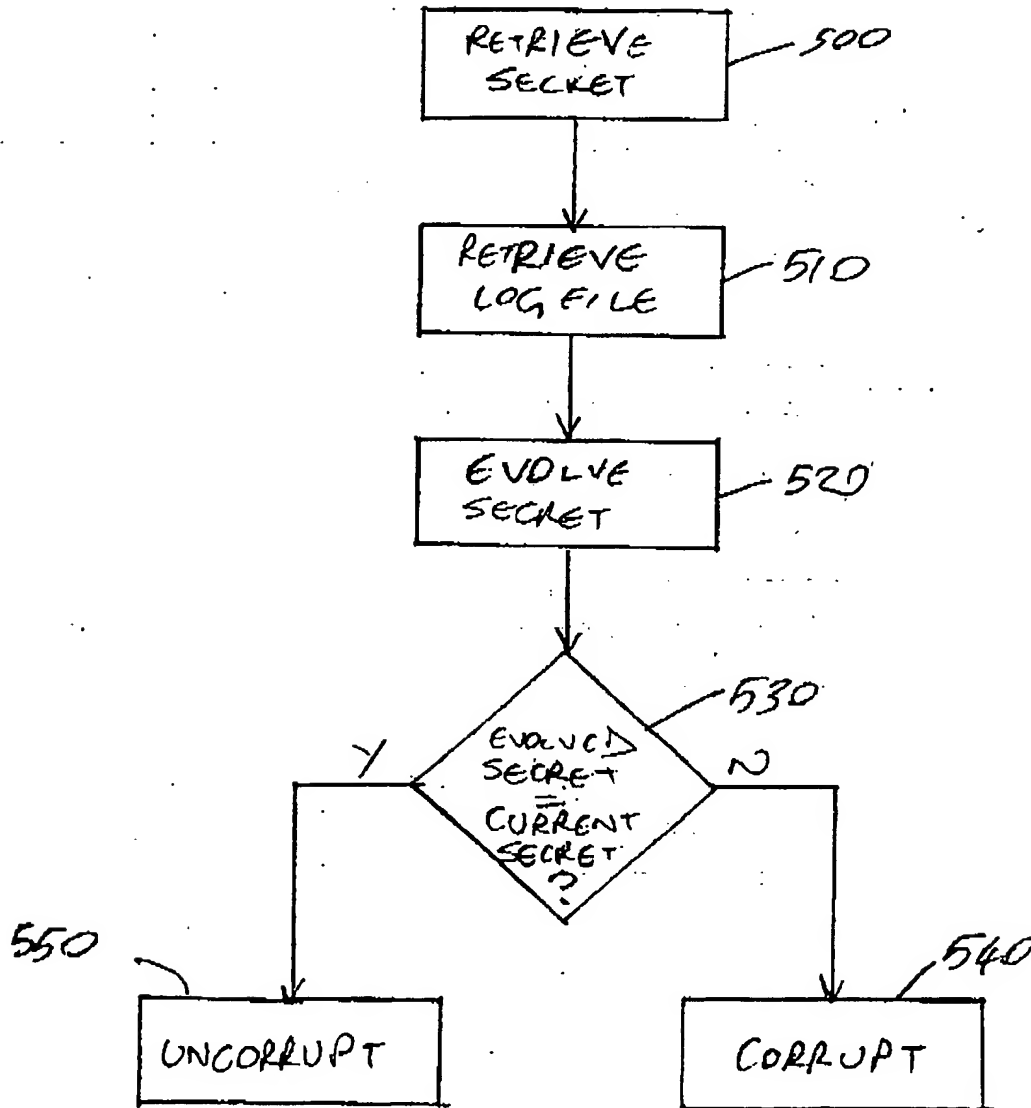
4/6

Fig. 4

BEST AVAILABLE COPY

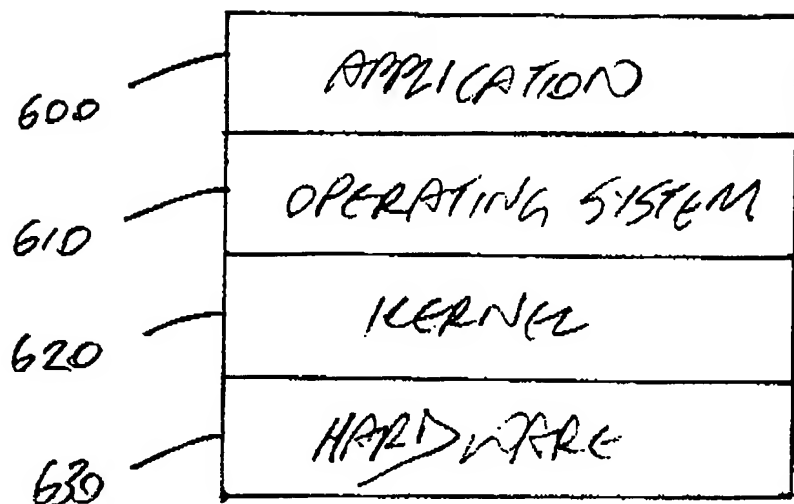
CHA-2002-0047

5/6

FIG. 5

CH9-2002-0047

6/6.

FIG. 6

CH9-2002-0047

17

ABSTRACT

Described is a method for detecting an attack on a data processing system, comprising, in the data processing system: providing a initial secret; binding the initial secret to data
5 indicative of an initial state of the system via a cryptographic function; recording state changing administrative actions performed on the system in a log; prior to performing each state changing administrative action, generating a new secret by performing the cryptographic
10 function on a combination of data indicative of the administrative action and the previous secret, and erasing the previous secret; evolving the initial secret based on the log to produce an evolved secret; comparing the evolved secret with the new secret; determining that the system is
15 uncorrupted if the comparison indicates a match between the evolved secret and the new secret; and, determining that the system is corrupted if the comparison indicate a mismatch between the evolved secret and the new secret.

THIS PAGE BLANK (USPTO)